

INSTRUCTION GUIDE

DIMANGO PRODUCTS

Push On/Off Dimmer SDP603A

Congratulations on a wise purchase!


INSTRUCTIONS

Install in accordance with national and local electrical codes.


- Warning:** Disconnect power at electrical service entrance by removing fuse or switching circuit breaker to "OFF".

Note: Use only one dimmer with one 3-Way On/Off switch. Do not use two dimmers when using this Push On/Off model.

- Remove faceplate of old light switch.
- Remove screws holding old switch to wall box without disconnecting wires.
- Identify "common terminal" on old switch (color coded with darker terminal color than others, or word "common" on case).
- Disconnect the wire from the common terminal and connect to black (common) wire on dimmer.
- Disconnect remaining wires from old switch.
- Connect remaining wire leads on dimmer to remaining wires from old switch, noting color wire attached to each wire lead of dimmer (see diagram above).
- Mount dimmer to wall box with 2 screws.
- Replace existing faceplate so that shaft protrudes through opening in the center of plate.
- Push plastic knob onto shaft.
- Restore power.

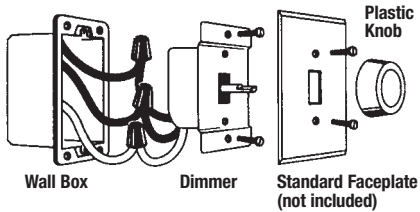

WIRING DIAGRAM

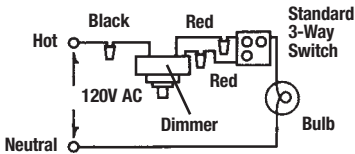

Wiring

- The insulation strip length: 3/8" for solid wires and 5/8" for stranded wires.
- One piece of 18 AWG wire is intended to be connected to a 12 to 14 AWG wire by supplied connectors.
- Supplied connectors for use with copper wire only.

Derating: When ganging two dimmers together, derate to 500 watts each, when ganging three dimmers together, derate to 400 watts each.

Caution: To reduce the risk of overheating & possible damage to other equipment, do not install to control a receptacle, a motor-operated appliance, a fluorescent lighting fixture, or a transformer-supplied appliance.

LIMITED WARRANTY

The product you have purchased is guaranteed against defects in workmanship and materials for the period stated on the package. If the product fails due to a manufacturing defect during normal use, return the product to the store where purchased for replacement OR send product to:

Lamson Home Products
25701 Science Park Drive
Cleveland, OH 44122 USA
Attn: Customer Service

Not Covered - Light bulbs and other expendable items, repair service, adjustment and calibration due to misuse, abuse or negligence are not covered by this warranty. Unauthorized service or modification of the product or of any furnished components will void this warranty in its entirety. This warranty does not include reimbursement for inconvenience, installation, set-up time, loss of use, postage, unauthorized service, or other products used in conjunction with, but are not supplied by, Lamson Home Products.

All requests for replacement must include a **dated sales receipt** (copies accepted) and this guarantee statement. LAMSON HOME PRODUCTS SHALL NOT BE LIABLE FOR LOST PROFITS, INDIRECT, SPECIAL, EXEMPLARY, INCIDENTAL OR CONSEQUENTIAL DAMAGES INCLUDING WITHOUT LIMITATION ANY SUCH DAMAGES DUE TO IMPROPER WIRING OR MISUSE OF THE PRODUCT.

ALSO AVAILABLE FROM DIMANGO PRODUCTS:

- Extend-A-Chime® – lets you hear your existing wired doorbell in remote areas of your home or yard
- Plug-in and Battery Doorbells and Chimes
- On/Off Remote Switches
- Touch and Automatic Lighting Controls



LAMSON Home Products
25701 Science Park Drive
Cleveland, Ohio 44122 USA
www.lamson-home.com
©2002 LAMSON & SESSIONS

DIMANGO®

Made in China
0206 IS152